

Ziegler

Redefine Innovative Metering


Technical Datasheet

ZOT PR

ELECTRICAL SIGNAL CONVERTER – MULTI PARAMETER PRXX

Product Features

- **Measuring Input** : AC Voltage/Current input signal,sine wave or distorted wave form
- **Analog Output** :
Analog output which can be set in between -20mA•••20mA onsite.
 - Admissible overflow on analog output: 20% of lower and upper value.
- **Programmable PT,CT Ratio** : The Transducer can be programmed onsite using through RS 485 or USB port..
- **LED Indication** : LED indication for power on,RS485 transmission, reception and alarm switching .
- **RS485 Communication:**
 - RS485 communication is available. For reading
 - measured parameter & onsite configuration of input/output.
- **USB Communication:**
 - RS485 communication is available. For reading
 - measured parameter & onsite configuration of input/output.
- **Energy Measurement** : Tetraquadrantic energy measurement (Ep+, Ep-, EqL, Eqc).
- **Mean Active Power** : Measurement of 15, 30 or 60 minutes ' mean active power (synchronization by an internal clock or a walking window) with the archiving function of 1000 last samples.
- **Galvanic Isolation** : Transducer output signal are galvanically isolated from the input signal.
- **Pulse constant of OC type output** : 5000-20000imp./KWh, independently on setting of ratios Ku,Ki
- **Alarm Indications** : The alarm indication can be set for measured input parameter

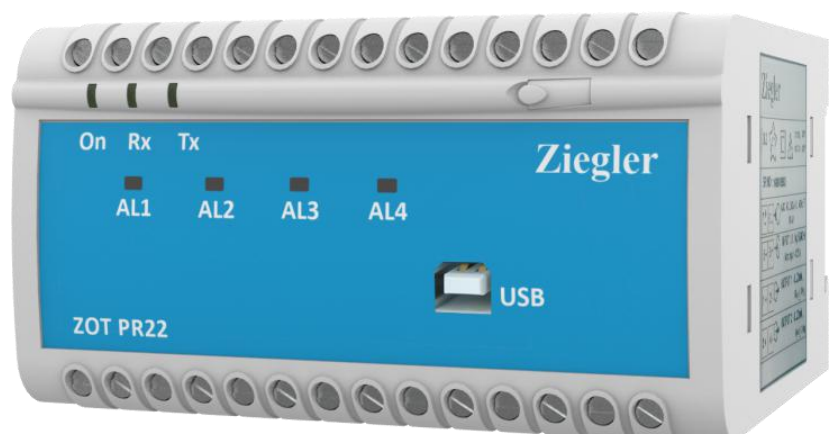

Technical Specifications

Measured quantity		Measuring range	L1	L2	L3	Σ	Basic error
Current 1/5A L1...L3		0.02...6 A \sim	●	●	●		±0.2%
Voltage L-N	57.7V \sim	2.9. 69.24 V \sim	●	●	●		±0.2%
	230.0V \sim	11.5... 276 V \sim					
Voltage L-L	100.0V \sim	5.0... 120 V \sim	●	●	●		±0.5%
	400.0V \sim	20... 480 V \sim					
Frequency		47.0. 63.0 Hz	●	●	●		±0.2%
Active power		-1.65 kW...1.4 W....1.65 kW	●	●	●	●	±0.5%
Reactive power		-1.65 kva r...1.4 var..... 1.65 kvar	●	●	●	●	±0.5%
Apparent power		1.4 VA. 1.65 kVA	●	●	●	●	±0.5%
PF factor		-1...0...1	●	●	●	●	±0.5%
Tangens		-1.2...0...1.2	●	●	●	●	±1%
Cosine		-1...1	●	●	●	●	±1%
Angle between U and I		-180 °... 180 °	●	●	●		±0.5%

Input active energy	0.99 999 999.9 kWh				●	±0.5%
Developed active energy	0.99 999 999.9 kvarh				●	±0.5%
Reactive inductive energy	0.99 999 999.9 kWh				●	±0.5%
Reactive capacitive energy	0.99 999 999.9 kvarh				●	±0.5%
THD in the range 10...120% U,I; 48...52 Hz; 58..62 Hz	0...100%	●	●	●	●	±5%

For correct current measurement, the presence of voltage with the value higher than 0.05 U_n is required at least on one phase.

Power Consumption

in supply circuit	≤ 10 VA
in voltage circuit	≤ 0.05 VA
in current circuit	≤ 0.1 VA
Analog Outputs	0, 2 or 4 programmable outputs: - 20...0...+20 mA, R load: 0..750 (Note- For admissible overflow of 20% on analog output R load = 0..600)
Relay Outputs	0, 2 or 4 relays, voltageless NO contacts load capacity 250 V~/ 0.5 A~
Serial Interface:	RS-485: address 1...247; mode: 8N2, 8E1, 8O1, 8N1; baud rate: 4.8, 9.6, 19.2, 38.4 kbit/s, USB: 1.1 / 2.0, address 1; mode 8N2; baud rate 9.6 kbit/s
Transmission Protocol:	Modbus RTU Response time: 500 ms
Energy Pulse Output:	output of OC type, passive acc. to EN 62053-31
Pulse Constant of OC Type Output:	5000 -20000 imp./kWh, independently on settings ratios K_u , K_i
Ratio of the Voltage Transformer K_u :	0.1.....4000.0


Ratio of the Current Transformer Ki:	1. 10000
Protection Degree:	
for the housing	IP 40
from terminals	IP 20
Weight:	0.45 kg
Dimensions:	122.5 x 66.0 x 106.5mm
Mounting position:	Rail mounting/wall mounting
Reference and Rated Operating Conditions:	
Supply voltage	85...253 V a.c. 40. 400 Hz;90. 320 V d.c.or 20...40 V a.c. 40. 400 Hz;20. 60 V d.c.
Input Signal :	
Voltage	0...0.05. 1.2 Rated Value(Un)
Current	0...0.005. 1.2 Rated value (In)
Frequency	47. 63 Hz
Power factors (Pf)	-1...0...1(0 Lag...1. Lead 0) (0...0.1...1.2In and 0...0.1...1.2Un) sinusoidal(THD 8%)
Tangens	-1.2...0...1.2 (0...0.1...1.2In and 0...0.1. 1.2Un)sinusoidal (THD≤8%)
Analog outputs	-24...-20...0...+20. 24 Ma
Ambient temperature	-10...23. +55°C
Storage temperature	-30...+70 °C
Relative humidity	25. 95% (inadmissible condensation)
Admissible peak factor	
current	2
voltage	2
External magnetic field	0..40. 400 A/m
Short duration overload 5 sec	
-voltage inputs	2Un (max.1000 V)
-current inputs	10 In
Work position	Any

Preheating time	5 min.
Additional errors: In percentage of the basic error:	
From frequency of input signals	< 50%
From ambient temperature changes	< 50%/10 ⁰ C
For THD > 8%	< 100%
Standards Fulfilled by the Meter - Electromagnetic Compatibility:	
Noise immunity	acc. to EN 61000-6-2
Noise emission	acc. to EN 61000-6-4
Safety Requirements:	
Isolation between circuits	1min. (EN 61010-1) 3110V DC, All terminals versus outer surface 3110V DC, Input versus all other circuit 3110V DC, Auxiliary supply versus outer surface and all other circuit. (Note - No isolation between the analog outputs)
Installation category	III
Pollution level	2
Maximal phase-to-hearth voltage	300 V
- for supply and measurement circuit	50 V
- for other circuits	
Altitude above sea level	< 2000 m


LED INDICATION :



LED	State	Indication
ON	Green continuous	Aux Supply healthy condition and calibration ok
Rx	Pulsing	Data reception through RS485
Tx	Pulsing	Data transmission through Rs485
AL1.... AL4	Continuous ON	Alarm ON

TERMINAL DETAILS

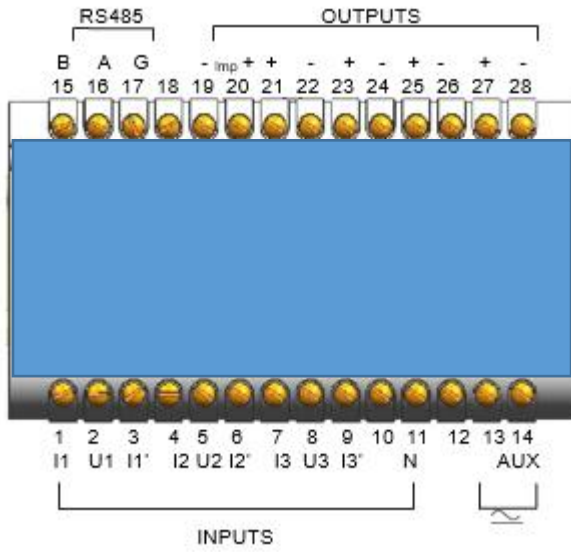


Connection Diagram and Installation

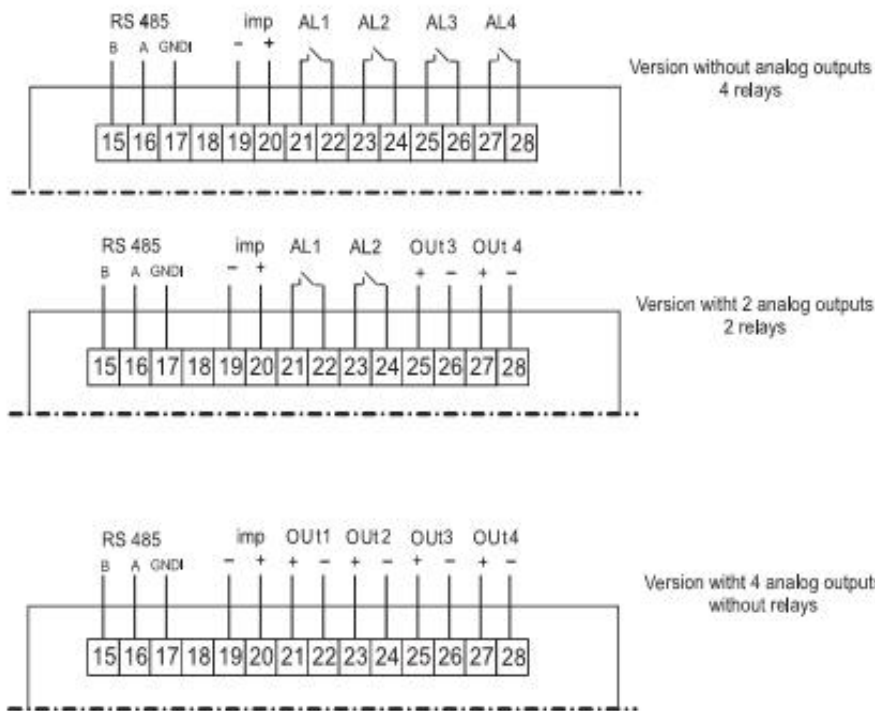

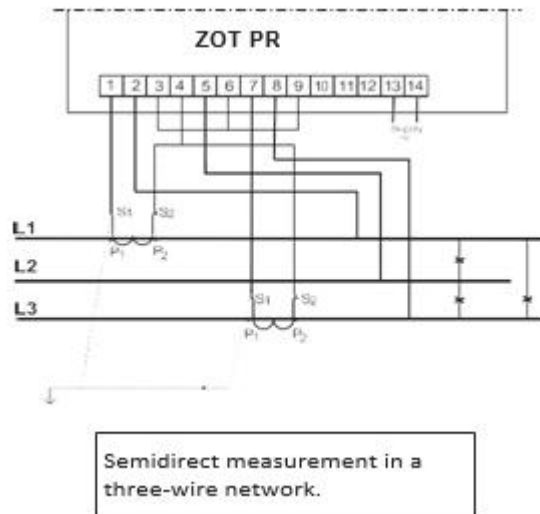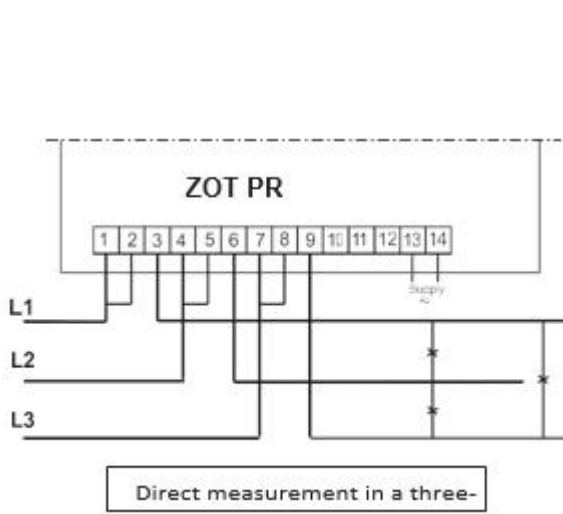


ELECTRICAL NETWORK


Indirect measurement with the use of 3 current transformers and 2 or 3 voltage

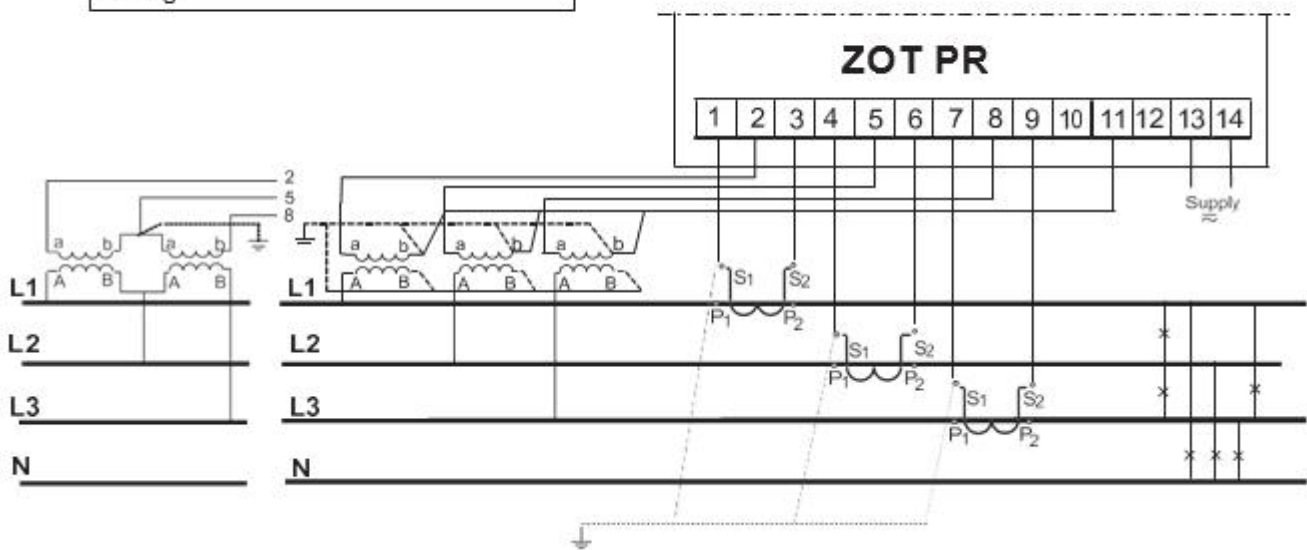

ZOT PR

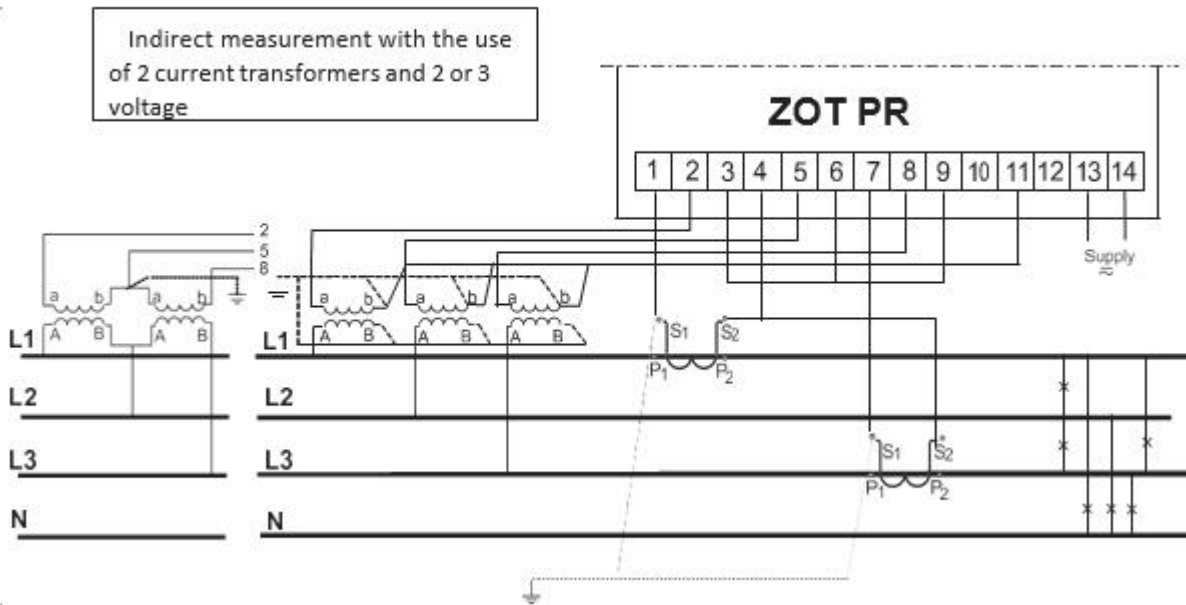

DIMENSIONS

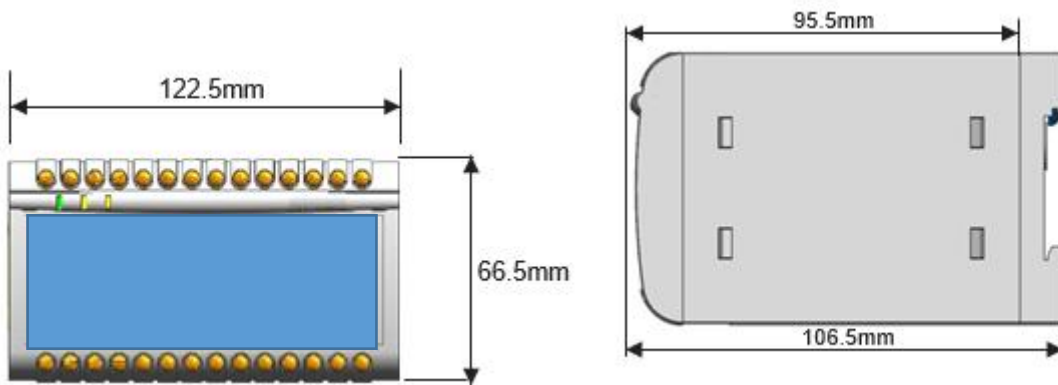

PROGRAMMING

PROGRAMMING OF TRANSDUCER

The eCon software is destined for the onfiguration of transducer. one must connect the transducer to a pc computer through the rs485 converter ,if the communication will be performed using Rs485 interface or directly through the USB .

Ziegler

Redefine Innovative Metering

Ziegler Instrumentation UK Ltd.

Central Buildings, Woodland close old woods Trading Estate, Torquay Devon, TQ2 7BB, United Kingdom

+441803 616 800 | info@ziegler-instrument.com | ziegler-instrument.com